


CAT40 VX - Mini Chuck

Features

- 3 μm - 0.0001" Runout @ 4X Diameter
- Front Locking System
- Coolant Thru
- Dynamically Pre-Balanced G2.5 @ 25,000 RPM or < 1gmm
- Tapers are ground better than AT3 for optimal T.I.R.

Optional (Order Separately):

- Wrench
- Torque Wrench
- Collets, STD and Jet-Blast
- DIN-B Flange Coolant
- Fine Trim Balance
(Sample cutter required for balance compensation)

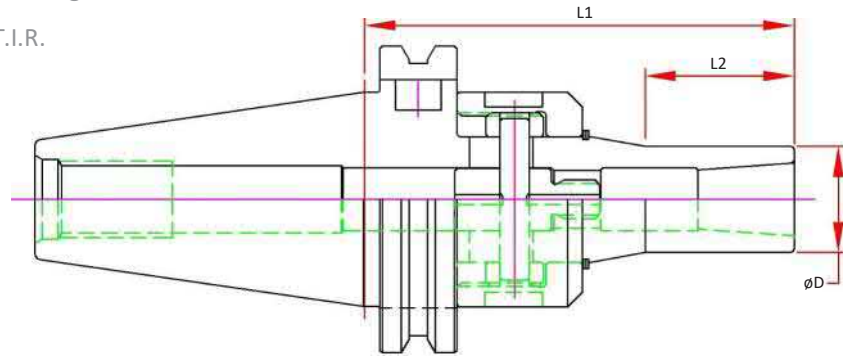

Dual Contact Spindle Part Number	Standard Spindle Part Number	Collet Range	D	L1 Projection	L2	Collet	Wrench	Locking Torque Max.
CAT40-VX06-0394-B	CAT40-VX06-0394	0.079 - 0.250	0.50	3.94	1.48	MX06	45-48 PIN	30 ft/lbs
CAT40-VX06-0591-B	CAT40-VX06-0591			5.91				
CAT40-VX08-0350-B	CAT40-VX08-0350	0.125 - 0.394	0.787	3.50	1.21	MX08		
CAT40-VX08-0591-B	CAT40-VX08-0591			5.91				
CAT40-VX12-0394-B	CAT40-VX12-0394	0.157 - 0.500	1.00	3.94	2.03	MX12		
CAT40-VX12-0591-B	CAT40-VX12-0591			5.91				

CAT 40

CAT50

BT30

BT40

HSK 40E

HSK 63A

HSK 100A

STRAIGHT SHANKS

COLLETS

PARTS & ACCESS.

SHRINK MACHINES

INDEXERS

