


CAT50 End Mill Adapters—Metric

Features

- 3 μm - 0.0001" Bore Runout
- H5 Bore Tolerance or better
- Tapers are ground better than AT3 for optimal T.I.R.
- Coolant Thru
- Pre-Balanced for use @ 20,000 RPM (CAT50 @ 15,000 RPM)

Optional (Order Separately):

- Jet-Blast (add "J" to the part number)
- DIN-B Coolant (Select models)

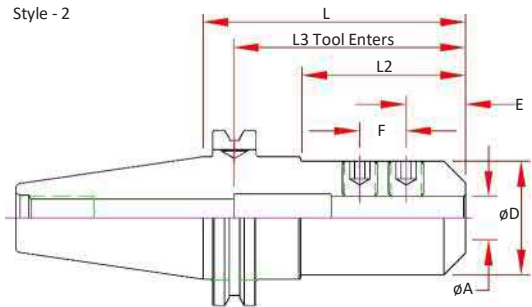

Standard Spindle Part Number	A Bore	D	E	F	L Projection	L2	L3 Max. Tool Enters	Screw #	Style
CAT50-EMM20-0400	20mm	1.75	1	-	4.00	2.5	6.25	8	2
CAT50-EMM25-0400	25mm	2.00	0.94	0.98	4.00	2.50	4.45	(2) 10	2
CAT50-EMM32-0400	32mm	2.50	0.94	1.10	4.00	2.50	3.35	(2) 11	2

CAT40

CAT 50

BT30

BT40

HSK 40E

HSK 63A

HSK 100A

STRAIGHT SHANKS

COLLETS

PARTS & ACCESS.

SHRINK MACHINES

INDEXERS

