


TB - Test Bar

Features

- Concentric to Taper within 3µm (0.0001”) TIR
- Tapers are ground better than AT3 for optimal T.I.R.
- Hardened & Normalized for consistency
- 100% Individually inspected with Certification Sheet included
- Wood Box Included
- Laser Marked with Actual Diameter and Length

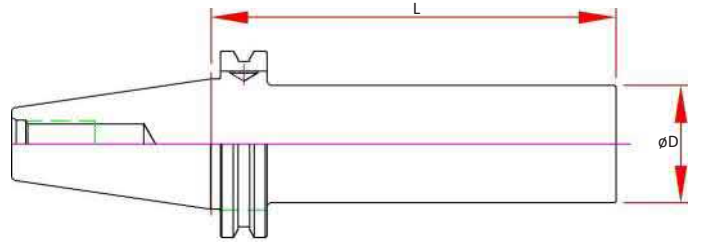

Dual Contact Spindle Part Number	Part Number	D	L Projection
CAT50-TB200-1200-B	CAT50-TB200-1200	2.00	12.00

CAT40

CAT 50

BT30

BT40

HSK 40E

HSK 63A

HSK 100A

STRAIGHT
SHANKS

COLLETS

PARTS &
ACCESS.

SHRINK
MACHINES

INDEXERS

