


TB - Test Bar

Features

- Concentric to Taper within $3\mu\text{m}$ (0.0001") TIR
- Tapers are ground better than AT3 for optimal T.I.R.
- Hardened & Normalized for consistency
- 100% Individually inspected with Certification Sheet included
- Wood Box Included
- Laser Marked with Actual Diameter and Length

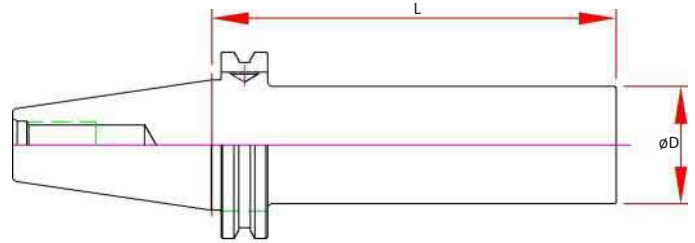

Part Number	Spindle	D	L Projection
BT30-TB32-200-B	STD & Dual Contact BT30	32mm	200mm

CAT40

CAT50

BT 30

BT40

HSK 40E

HSK 63A

HSK 100A

STRAIGHT SHANKS

COLLETS

PARTS & ACCESS.

SHRINK MACHINES

INDEXERS

