


# HSK040E Shrink Fit - Inch

## Features

- 3  $\mu\text{m}$  - 0.0001" Runout Taper to Bore
- Manufactured from ISO-40CrMoV5 (H13) Material, Heat Treated for Optimum Elasticity and Tool Life
- X Jet-Blast Pluggable Coolant Ports
- Dynamically Balanced for G2.5 @ 25,000 RPM or < 1 gmm
- Preset Screw included for 1/4" & larger for positive stop
- Designed for Carbide Cutting Tools with h6 shank tolerance

## Optional (Order Separately):

- Fine Trim Balance  
(Sample cutter required for balance compensation)

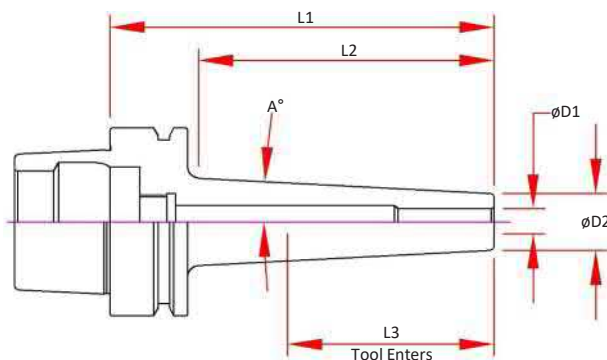

Part Number	D1 Bore	D2	A°	L1 Projection	L2	L3 Tool Enters
HSK040A-SD012-060-SN	0.1250	0.354	3°	2.36	1.46	1.53
HSK040A-SD018-060-SN	0.1875	0.433	3°	2.36	1.46	1.53
HSK040A-SD025-060-SN	0.2500	0.472	3°	2.36	1.46	1.53
HSK040A-SD037-060-SN	0.3750	0.630	3°	2.36	1.46	1.65
HSK040A-SD050-060-SN	0.5000	0.709	3°	2.36	1.46	1.65