


HSK040E Shrink Fit - Metric

Features

- 3 μm - 0.0001" Runout Taper to Bore
- Manufactured from ISO-40CrMoV5 (H13) Material, Heat Treated for Optimum Elasticity and Tool Life
- X Jet-Blast Pluggable Coolant Ports
- Dynamically Balanced for G2.5 @ 25,000 RPM or < 1 gmm
- Preset Screw included for 1/4" & larger for positive stop
- Designed for Carbide Cutting Tools with h6 shank tolerance

Optional (Order Separately):

- Fine Trim Balance
(Sample cutter required for balance compensation)

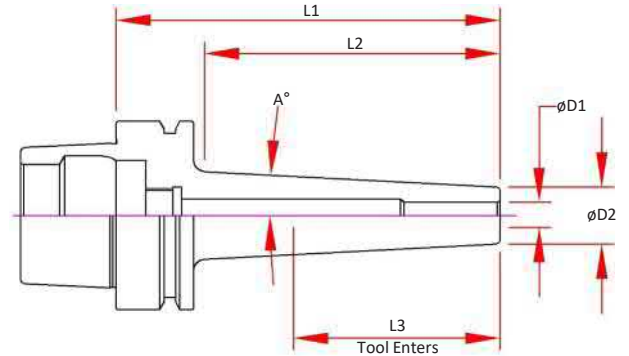

Part Number	D1 Bore	D2	A°	L1 Projection	L2	L3 Tool Enters
HSK040A-SDM03-060-SN	3.000	0.354	3°	2.36	1.46	1.53
HSK040A-SDM04-060-SN	4.000	0.394	3°	2.36	1.46	1.53
HSK040A-SDM06-060-SN	6.000	0.472	3°	2.36	1.46	1.53
HSK040A-SDM08-060-SN	8.000	0.551	3°	2.36	1.46	1.53
HSK040A-SDM10-060-SN	10.000	0.630	3°	2.36	1.46	1.65
HSK040A-SDM12-060-SN	12.000	0.709	3°	2.36	1.46	1.65

CAT40
CAT50
BT30
BT40
HSK 40E

HSK 63A

HSK 100A

STRAIGHT SHANKS

COLLETS

PARTS & ACCESS.

SHRINK MACHINES

INDEXERS

