


HSK100A VX Mini Chuck

Features

- 3 μm - 0.0001" Runout @ 4X Diameter
- Front Locking System
- Coolant Thru
- Dynamically Pre-Balanced G2.5 @ 25,000 RPM or < 1gmm

Optional (Order Separately):

- Wrench
- Torque Wrench
- Collets, STD and Jet-Blast
- Fine Trim Balance (Sample cutter required for balance compensation)

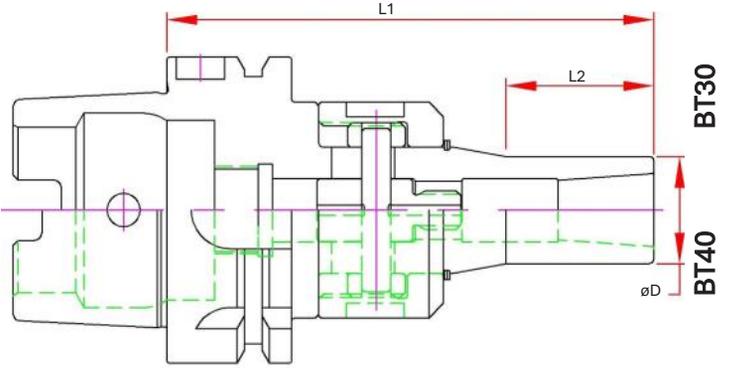

	Part Number	Collet Range	D	L1 Projection	L2	Collet	Wrench	Locking Torque Max.
HSK100A	HSK100A-VX06-110	0.079 - 0.250	0.500	4.33	1.48	MX06	45-48 PIN	30 ft/lbs
	HSK100A-VX06-150			5.91				
	HSK100A-VX08-110	0.125 - 0.394	0.787	4.33	1.21	MX08		
	HSK100A-VX08-150			5.91				
	HSK100A-VX12-120	0.157 - 0.500	1.000	4.53	2.03	MX12		
	HSK100A-VX12-165			6.49				

CAT40
CAT50
BT30
BT40
HSK 40E
HSK 63A
STR. SHANKS
COLLETS
ACC.
SHRINK MACH
INDEXERS

HSK100A

