



HSK100A End Mill Adapters

Features

- 3 μm - 0.0001" Bore Runout
- H5 Bore Tolerance or better
- Coolant Thru
- Pre-Balanced for use @ 20,000 RPM (HSK100A @ 15,000 RPM)

Optional (Order Separately):

- Jet-Blast (add "J" to the part number)

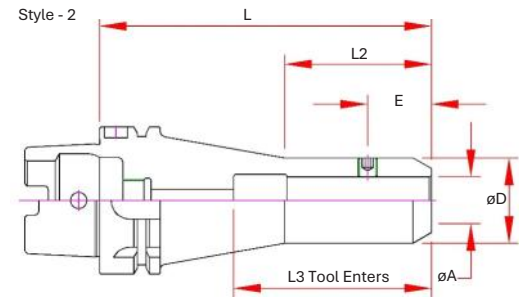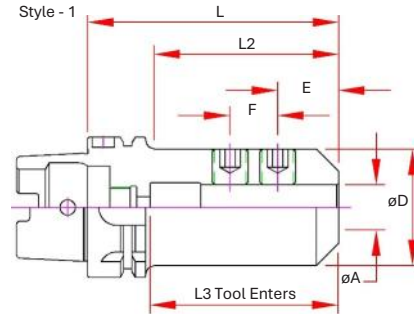

Part Number	A Bore	D	E	F	L Projection	L2	L3 Max. Tool Enters	Screw Number	Style
HSK100A-EM037-0400	0.3750	1.00	0.75	-	4.00	2.85	3.37	5	1
HSK100A-EM037-0600					6.00	3.00	5.37		2
HSK100A-EM050-0400	0.5000	1.25	0.88	-	4.00	2.85	2.56	6	1
HSK100A-EM050-0600					6.00	3.13	3.07		2
HSK100A-EM050-0800					8.00	3.13	3.07		2
HSK100A-EM062-0400	0.6250	1.50	0.94	-	4.00	2.85	2.56	7	1
HSK100A-EM062-0600					6.00	4.85	3.50		1
HSK100A-EM075-0400	0.7500	1.75	1.00	-	4.00	2.85	2.56	8	1
HSK100A-EM075-0600					6.00	1.97	4.00		2
HSK100A-EM075-0800					8.00	1.97	4.00		2
HSK100A-EM100-0400	1.0000	2.56	1.12	1.00	4.00	2.85	2.70	(2) 10	1
HSK100A-EM100-0600					6.00	4.85	4.50		1
HSK100A-EM100-0800					8.00	6.85	4.50		1
HSK100A-EM125-0400	1.2500	2.81	1.12	1.00	4.00	2.85	2.81	(2) 11	1
HSK100A-EM125-0600					6.00	4.85	3.23		1
HSK100A-EM125-0800					8.00	6.85	3.23		1
HSK100A-EM150-0450	1.5000	2.75	1.12	1.00	4.50	3.35	3.26	(2) 11	1
HSK100A-EM150-0600					6.00	5.35	3.26		1
HSK100A-EM200-0550	2.0000	3.75	1.41	1.50	5.50	4.35	4.13	(2) 13	1