

Straight Shank End Mill Adapters




Features

- 3 μm - 0.0001" Bore Runout
- H5 Bore Tolerance or better
- Coolant Thru

Optional (Order Separately):

- Jet-Blast (add "J" to the part number)

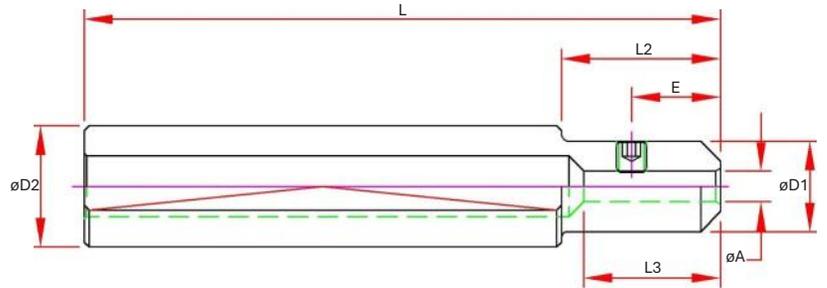

	Part Number	A	D1	D2	E	L Length	L2	L3 Max. Tool Enters	Screw Number
1/8	S075-EM012-0600	0.1250	0.50		0.19		2.00		1
3/16	S075-EM018-0600	0.1875	0.56	0.7500	0.44	6.00	2.00	6.00	2
1/4	S075-EM025-0600	0.2500	0.75		0.59		-		4
5/16	S075-EM031-0600	0.3125	0.75	0.44	-		4		
3/8	S100-EM037-0600	0.3750	1.00	1.0000	0.75	-	-	5	
1/2	S100-EM050-0600	0.5000	1.00		0.39 & 0.98	-	(2) 4		

CAT40
CAT50
BT30
BT40
HSK 40E
HSK 63A
HSK 100A
STR. SHANKS
COLLETS
ACC.
SHRINK MACH
INDEXERS

