


TC - Tension & Compression Holders

Features

- Tension and Compression Stroke for improved tap life
- Pressure Point Mechanism to increase the cutting pressure and ensure a positive start
- Size 3 includes pull to release system to prevent damage from over stroke
- TC Holders are not designed for Coolant Thru
- For use with both RA and TC adapters
 - TC for machines with limited "Z" control
- 2 Piece Design is assembled Straight Shank Tap Holder with End Mill Adapter
- Tapers are ground better than AT3 for optimal T.I.R.

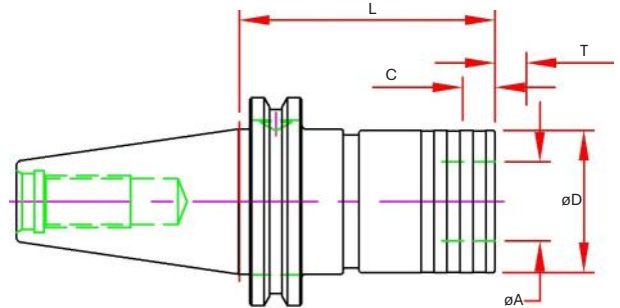

CAT40

CAT50

BT 30

BT40

HSK 40E

HSK 63A

HSK 100A

STR. SHANKS

COLLETS

ACC.

SHRINK MACH

INDEXERS




Size	Dual Contact Spindle Part Number	Standard Spindle Part Number	2 Piece Design	Capacity	A	D	L	T Tension	C Comp.
1	BT30-TC1-0433-B	BT30-TC1-0433	Y	#6-9/16	0.75	1.42	4.33	0.30	0.30
2	BT30-TC2-0511-B	BT30-TC2-0511	Y	5/16-7/8	1.22	2.09	5.11	0.49	0.49

RT - Rigid QC Tap Holders

Features

- Body - Coolant Thru Center
- Tapers are ground better than AT3 for optimal T.I.R.
- **For use with RA Adapters Only!**

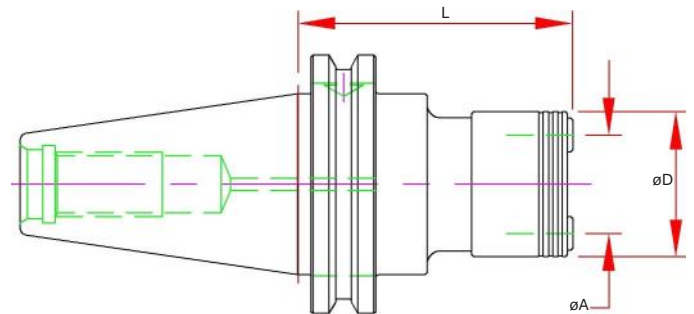

Size	Dual Contact Spindle Part Number	Standard Spindle Part Number	2 Piece Design	Capacity	A	D	L Projection
1	BT30-RT1-0432-B	BT30-RT1-0432	Y	#6-9/16	0.75	1.34	4.32
2	BT30-RT2-0511-B	BT30-RT2-0511	Y	5/16-7/8	1.22	1.93	5.11

