


# BT40 Mill Chucks

## Features

- 5  $\mu\text{m}$  - 0.0002" Runout @ 4 x Cutter Shank Dia.
- Designed for Tool Shanks w/ ISO h6 Class Tolerance
- Tapers are ground better than AT3 for optimal T.I.R.
- Pre-Balanced for use @ 20,000 RPM

## Optional (Order Separately):

- Wrench
- Nylon Screw Seal for short tool shanks
- DIN-B Flange Coolant
- Fine Trim Balance  
(Sample cutter required for balance compensation)

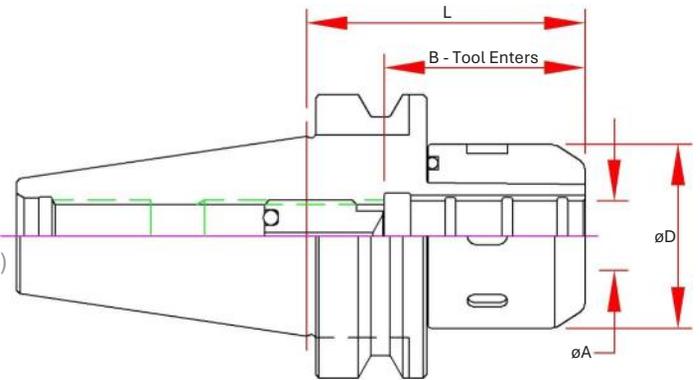

Part Number	A Bore	B Max. Tool Enters	D	L Projection	Preset Screw	Collet	Wrench
BT40-MC075-0295	0.7500	2.76	2.09	2.95	ASC-16-40	MC075	50-55 HOOK
BT40-MC100-0315	1.0000	2.91	2.44	3.15	ASC-16-40	MC100	58-65 HOOK
BT40-MC100-0472				4.72			
BT40-MC125-0335	1.2500	3.07	2.76	3.35	ASC-16-40	MC125	65-70 HOOK
BT40-MC125-0354				3.54			