

DC - Drill Chuck

Features:

- Non Coolant
- Keyless w/ slots for spanner wrench (sold separately)



CAT40

CAT50

BT30

BT 40

HSK 40E

HSK 63A

HSK 100A


STR. SHANKS

COLLETS

ACC.

SHRINK MACH

INDEXERS

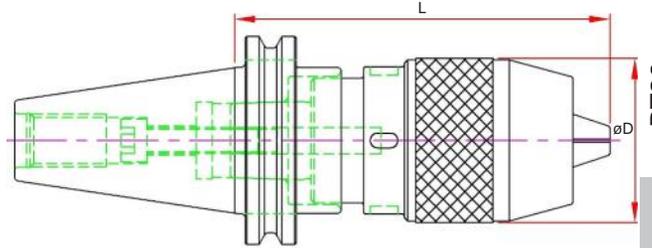


Part Number	Range	D	L Projection	Wrench
BT40-DC13-110	0.04 - 0.50	1.96	4.33	DCW13

TB - Test Bar

Features

- Concentric to Taper within 3µm (0.0001") TIR
- Tapers are ground better than AT3 for optimal T.I.R.
- Hardened & Normalized for consistency
- 100% Individually inspected with Certification Sheet included
- Wood Box Included
- Laser Marked with Actual Diameter and Length

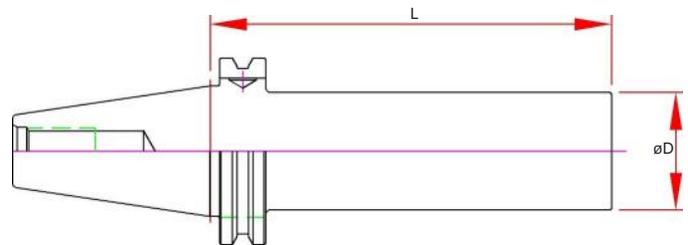

Part Number	Spindle	D	L Projection
BT40-TB40-300-B	STD & Dual Contact BT40	40mm	300mm

