

# HSK063A VX Mini Chuck+

## Features


- 3  $\mu\text{m}$  - 0.0001" Runout @ 4X Diameter
- Front Locking System
- Coolant Thru
- Dynamically Pre-Balanced G2.5 @ 25,000 RPM or < 1gmm

## Optional (Order Separately):

- Wrench
- Torque Wrench
- Collets, STD and Jet-Blast
- Fine Trim Balance (Sample cutter required for balance compensation)



Part Number	Collet Range	D	L1 Projection	L2	Collet	Wrench	Locking Torque Max.
HSK063A-VX06-105	0.079 - 0.250	0.500	4.13	1.48	MX06		
HSK063A-VX06-150	0.079 - 0.250	0.500	5.91	1.48	MX06		
HSK063A-VX08-105	0.125 - 0.394	0.787	4.13	1.21	MX08	45-48 PIN	30 ft/lbs
HSK063A-VX08-150	0.125 - 0.394	0.787	5.91	1.21	MX08	45-48 PIN	30 ft/lbs
HSK063A-VX12-115	0.157 - 0.500	1.000	4.53	2.03	MX12		
HSK063A-VX12-150	0.157 - 0.500	1.000	5.91	2.03	MX12		

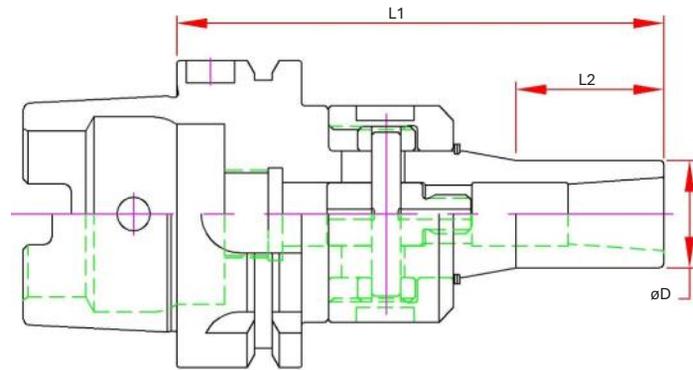

CAT40

CAT50

BT30

BT40

HSK 40E

HSK 63A

# HSK063A MX - Mini Chuck

## Features


- 3  $\mu\text{m}$  - 0.0001" Runout @ 4X Diameter
- Rear Draw Bolt Locking System
- Coolant Thru
- Dynamically Pre-Balanced G2.5 @ 25,000 RPM or < 1gmm

## Optional (Order Separately):

- Wrench
- Torque Wrench
- Collets, STD and Jet-Blast
- Fine Trim Balance (Sample cutter required for balance compensation)



Part Number	Collet Range	D	L1 Projection	L2	Collet	Wrench	Locking Torque Max.
HSK063A-MX06-100	0.079 - 0.250	0.500	3.94	1.42	MX06		
HSK063A-MX08-100	0.125 - 0.394	0.787	3.94	1.42	MX08	MXW05	20 ft/lbs
HSK063A-MX12-110	0.157 - 0.500	1.000	4.33	1.54	MX12		

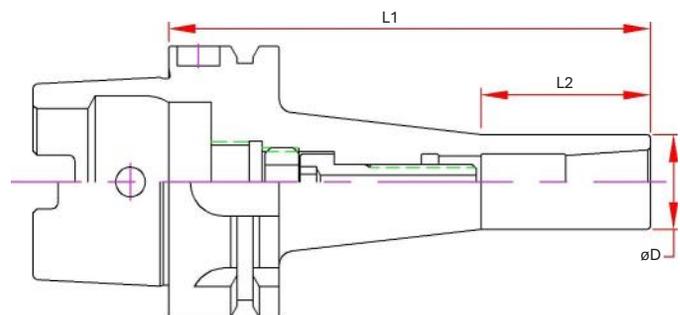

HSK 100A

STR. SHANKS

COLLETS

ACC.

SHRINK MACH

INDEXERS

