


HSK063A Hydraulic Chucks

Features

- * 3 μm - 0.0001" or less run-out providing premium performance in drilling and reaming applications
- Positive Locking System
- Coolant Thru the Center
- Designed for Tool Shanks w/ ISO h6 Class Tolerance
- Dynamically Pre-Balanced G2.5 @ 25,000 RPM or < 1gmm

Optional (Order Separately):

- Wrench
- Sealed Collets
- Mill Chuck Collets

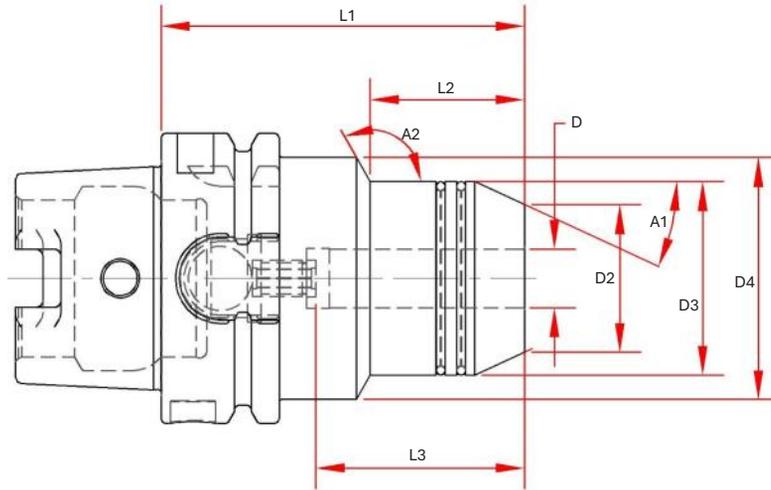

Part Number	D Bore	D2	D3	D4	A1	A2	L1 Projection	L2	L3 Max Tool Enters	Wrench
HSK063A-HC050-0315	0.5000	1.26	1.65	2.07	24.5°	120°	3.15	1.34	1.81	HCW04
HSK063A-HC075-0315	0.7500	1.50	2.07		24.5°		3.15	2.13	2.01	HCW05

CAT40
CAT50
BT30
BT40
HSK 40E
HSK 63A
HSK 100A
STR. SHANKS
COLLETS
ACC.
SHRINK MACH
INDEXERS

