

HSK100A Shrink Fit - Metric

Features


- 3 µm - 0.0001" Runout Taper to Bore
- Manufactured from ISO-40CrMoV5 (H13) Material, Heat Treated for Optimum Elasticity and Tool Life
- Coolant Thru the Center
- Dynamically Balanced for G2.5 @ 25,000 RPM or < 1 gmm
- Preset Screw included for 1/4" & larger for positive stop
- **Designed for Carbide Cutting Tools with h6 shank tolerance**

Optional (Order Separately):

- Jet-Blast Coolant Ports - Add "-J"
- Fine Trim Balance (Sample cutter required for balance compensation)



**STOCKED IN GERMANY
FREIGHT & DUTY SEPARATE**

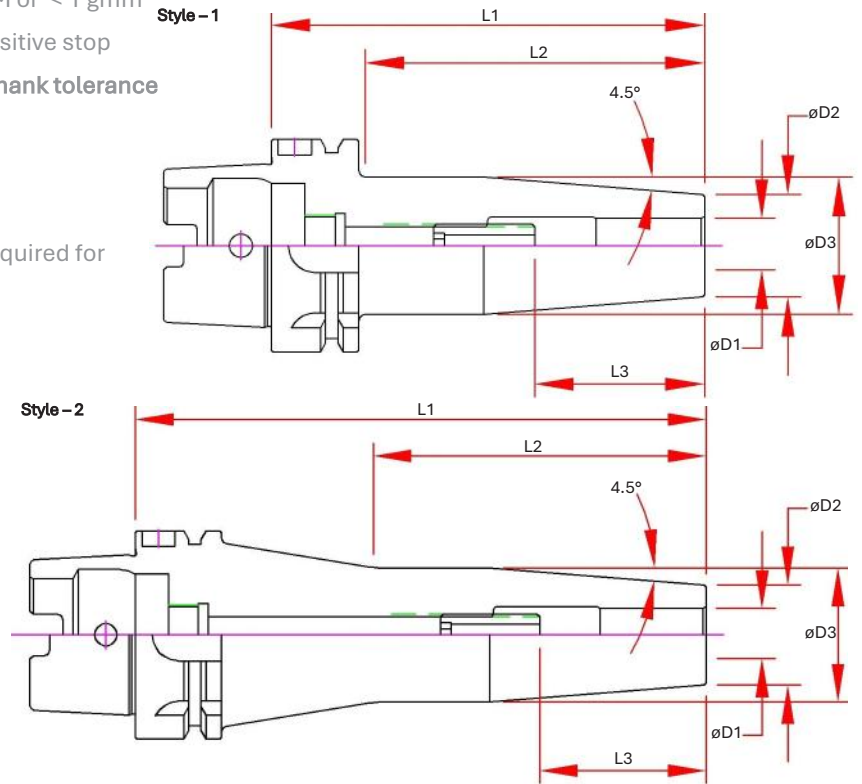

Part Number	D1 Bore	D2	D3	L1 Projection	L2	L3 Max Tool Enters	Preset Screw	Style
HSK100A-SDM06-085	6	21	27	85	51	37	SCW-ASC-05-23	1
HSK100A-SDM06-160	6	21	27	160	126	37	SCW-ASC-05-23	2
HSK100A-SDM08-085	8	21	27	85	51	37	SCW-ASC-06-23	1
HSK100A-SDM08-160	8	21	27	160	126	37	SCW-ASC-06-23	2
HSK100A-SDM10-090	10	24	32	90	56	42	SCW-ASC-08-23	1
HSK100A-SDM10-160	10	24	32	160	126	42	SCW-ASC-08-23	2
HSK100A-SDM12-095	12	24	32	95	61	48	SCW-ASC-10-23	1
HSK100A-SDM12-160	12	24	32	160	126	48	SCW-ASC-10-23	2
HSK100A-SDM16-100	16	27	34	100	66	51	SCW-ASC-12-23	1
HSK100A-SDM16-160	16	27	34	160	126	51	SCW-ASC-12-23	2
HSK100A-SDM20-105	20	33	42	105	71	53	SCW-ASC-12-23	1
HSK100A-SDM20-160	20	33	42	160	126	53	SCW-ASC-12-23	2
HSK100A-SDM25-115	25	44	53	115	81	59	SCW-ASC-16-23	1
HSK100A-SDM25-160	25	44	53	160	126	59	SCW-ASC-16-23	2
HSK100A-SDM32-120	32	44	53	120	86	63	SCW-ASC-16-23	1
HSK100A-SDM32-160	32	44	53	160	126	63	SCW-ASC-16-23	2

CAT40
CAT50
BT30
BT40
HSK 40E
HSK 63A
HSK100A
STR. SHANKS
COLLETS
ACC.
SHRINK MACH
INDEXERS

