
CAT40 MX - Mini Chuck



Features

- **3 µm - 0.0001" Runout @ 4X Diameter**
- Rear Draw Bolt Locking System
- Coolant Thru
- Dynamically Pre-Balanced G2.5 @ 25,000 RPM or < 1gmm
- Tapers are ground better than AT3 for optimal T.I.R.

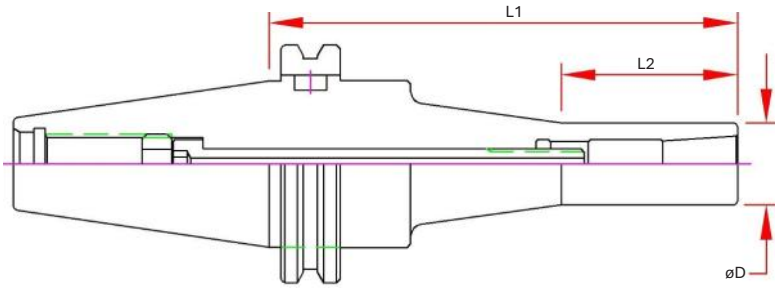

Optional (Order Separately):

- Wrench
- Torque Wrench
- Collets, STD and Jet-Blast
- DIN-B Flange Coolant
- Fine Trim Balance
  (Sample cutter required for balance compensation)



Dual Contact Spindle Part Number	Standard Spindle Part Number	Collet Range	D	L1 Projection	L2	Collet	Wrench	Locking Torque Max.
CAT40-MX06-085-B	CAT40-MX06-085	0.079 - 0.250	0.50	3.35	1.42	MX06	MXW05	20 ft/lbs
CAT40-MX06-150-B	CAT40-MX06-150			5.91				
CAT40-MX08-085-B	CAT40-MX08-085	0.125 - 0.394	0.787	3.35	1.42	MX08		
CAT40-MX08-120-B	CAT40-MX08-120			4.72				
CAT40-MX08-150-B	CAT40-MX08-150			5.91				
CAT40-MX12-090-B	CAT40-MX12-090	0.157 - 0.500	1.00	3.54	1.38	MX12		
CAT40-MX12-120-B	CAT40-MX12-120			4.72				