CAT40 End Mill Adapters


Features


- 3 µm - 0.0001" Bore Runout
- H5 Bore Tolerance or better
- Tapers are ground better than AT3 for optimal T.I.R.
- Coolant Thru
- Pre-Balanced for use @ 20,000 RPM


Optional (Order Separately):

- Jet-Blast (add "J" to the part number)
- DIN-B Coolant (Select models)



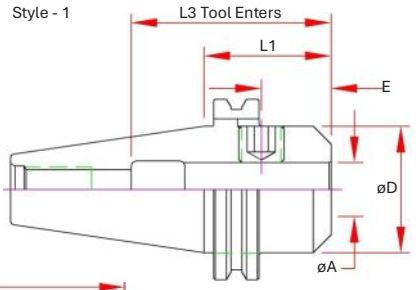

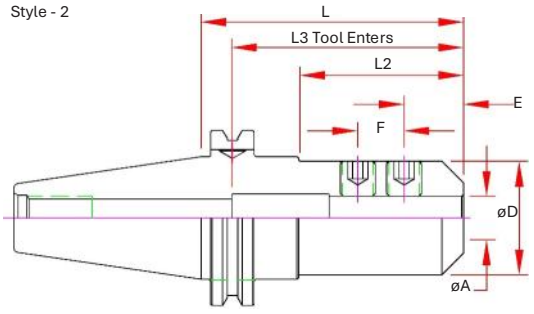

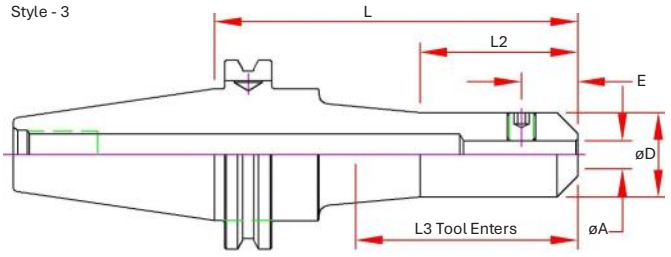



	Dual Contact Spindle Part Number	Standard Spindle Part Number	A Bore	D	E	L Projection	L2	L3 Max. Tool Enters	Screw Number	Style
1/8		CAT40-EM012-0175	0.1250	0.69	0.19	1.75	0.80	3.32	3	1
		CAT40-EM012-0250				2.50	0.92	4.07		2
		CAT40-EM012-0400				4.00	2.42	5.57		2
		CAT40-EM012-0500				5.00	1.57	6.57		3
		CAT40-EM012-0600				6.00	1.57	7.57		3
3/16		CAT40-EM018-0175	0.1875	0.69	0.44	1.75	0.88	3.32	3	1
		CAT40-EM018-0250				2.50	0.92	4.07		2
		CAT40-EM018-0400				4.00	2.42	5.57		2
		CAT40-EM018-0600				6.00	2.50	7.57		3
1/4		CAT40-EM025-0175	0.2500	0.78	0.44	1.75	0.80	3.32	4	1
		CAT40-EM025-0250				2.50	0.92	4.07		2
		CAT40-EM025-0400				4.00	2.42	5.57		2
		CAT40-EM025-0500				5.00	2.50	6.57		3
		CAT40-EM025-0600				6.00	2.50	7.57		3
		CAT40-EM025-0900				9.00	2.50	10.57		3
5/16		CAT40-EM031-0175	0.3125	0.88	0.44	1.75	0.88	3.32	4	1
		CAT40-EM031-0250				2.50	0.92	4.07		2
		CAT40-EM031-0400				4.00	2.42	5.57		2
		CAT40-EM031-0600				6.00	3.00	7.57		3
3/8		CAT40-EM037-0175	0.3750	1.00	0.75	1.75	0.88	4.07	5	1
	CAT40-EM037-0250-B	CAT40-EM037-0250				2.50	1.00	4.07		2
	CAT40-EM037-0400-B	CAT40-EM037-0400				4.00	2.50	5.57		2
		CAT40-EM037-0450				4.50	1.00	6.07		3
		CAT40-EM037-0500				5.00	1.00	6.57		3
	CAT40-EM037-0600-B	CAT40-EM037-0600				6.00	2.50	7.57		3
		CAT40-EM037-0900				9.00	2.50	10.57		3
7/16		CAT40-EM043-0250	0.4375	1.25	0.75	2.50	1.00	4.07	5	2
1/2	CAT40-EM050-0175-B	CAT40-EM050-0175	0.5000	1.75	0.88	1.75	0.96	3.07	6	1
	CAT40-EM050-0250-B	CAT40-EM050-0250		1.25		2.50	1.00	3.07		2
		CAT40-EM050-0262		1.25		2.62	1.12	3.07		2
	CAT40-EM050-0400-B	CAT40-EM050-0400		1.25		4.00	2.58	3.07		2
		CAT40-EM050-0462		1.25		4.62	3.20	3.07		2
		CAT40-EM050-0500		1.25		5.00	3.50	3.07		2
	CAT40-EM050-0600-B	CAT40-EM050-0600		1.25		6.00	3.00	3.07		3