BT30 Shell Mill Adapters




Features

- 3 µm - 0.0001" Bore Runout
- H5 Bore Tolerance or better
- Tapers are ground better than AT3 for optimal T.I.R.
- Pre-Balanced for use @ 20,000 RPM

Optional (Order Separately):

- FX Coolant (add "F" to the part number)

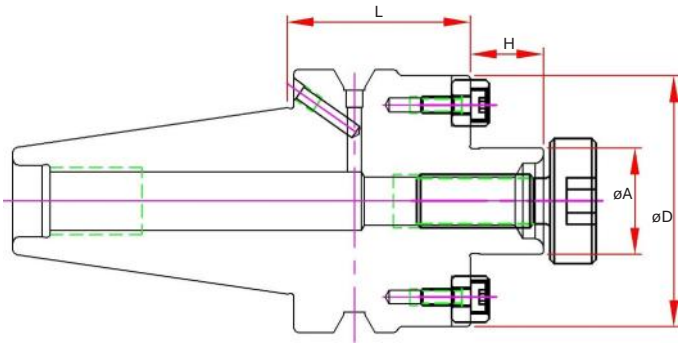


P-54

Dual Contact Spindle Part Number	Standard Spindle Part Number	A Pilot	D	H	L Projection	Drive Key Size	Drive Key Number	Mounting Screw Thread	Mounting Screw#
BT30-SM050-0119-B	BT30-SM050-0119	0.50	1.38	0.57	1.19	0.250	DK-SM050	1/4-28	SCW-SM050
BT30-SM050-0200-B					2.00				
BT30-SM050-0400-B					4.00				
BT30-SM075-0119-B	BT30-SM075-0119	0.75	1.75	0.69	1.19	0.312	DK-SM075	3/8-24	SCW-SM075
BT30-SM075-0200-B					2.00				
BT30-SM075-0400-B					4.00				
BT30-SM100-0119-B	BT30-SM100-0119	1.00	1.97	0.69	1.19	0.375	DK-SM100	1/2-20	SCW-SM100