


HSK100A ER Collet Chucks

Features

- 3 μm - 0.0001" Runout Taper to Taper
- Coolant Thru Body
- Dynamically Pre-Balanced G6.3 @ 15,000 RPM or <1gmm

Optional (Order Separately):

- Wrench
- Torque Wrench
- Collets
 - 0.010mm (0.0004") Standard
 - 0.005mm (0.0002") Ultra Precision
 - Sealed (Select Sizes)
 - Jet-Blast (Select Sizes)

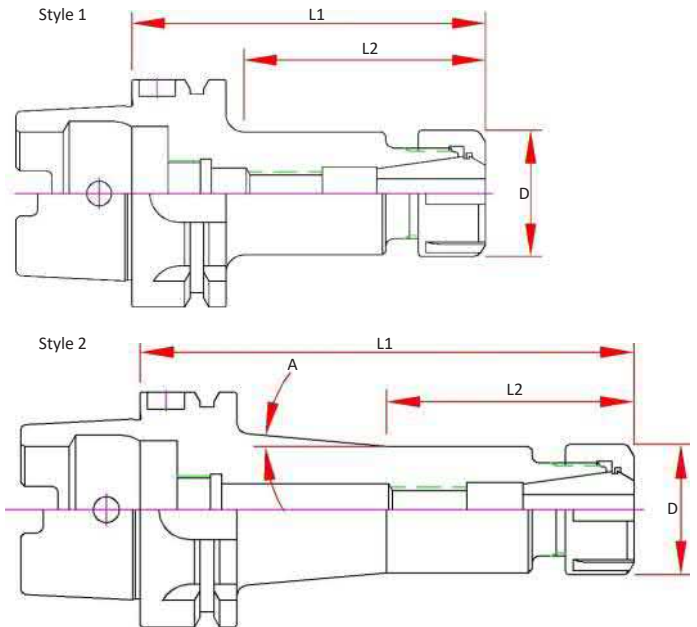

Part Number	Style	A	D	Max. Tool Enters	L1 Projection	L2	Screw	Nut	Wrench
HSK100A-ER16H-100	1	-	1.10	2.80	3.94	2.20	ASC-ER16	ERN-16H	ERW-16H
HSK100A-ER16H-160	2	6°	1.10	5.17	6.30	2.76	ASC-ER16	ERN-16H	ERW-16H
HSK100A-ER25-100	1	-	1.65	2.63	3.94	2.20	ASC-ER25	ERN-25	ERW-25E
HSK100A-ER25-160	2	3°	1.65	2.95	6.30	3.35	ASC-ER25	ERN-25	ERW-25E
HSK100A-ER32-100	1	-	1.96	2.67	3.94	2.20	ASC-ER32	ERN-32	ERW-32E
HSK100A-ER32-160	2	3°	1.96	3.22	6.30	3.39	ASC-ER32	ERN-32	ERW-32E
HSK100A-ER40-120	1	-	2.48	3.46	4.72	3.35	ASC-ER40	ERN-40	ERW-40E
HSK100A-ER40-160	2	4°	2.48	3.78	6.30	3.48	ASC-ER40	ERN-40	ERW-40E

CAT40

CAT50

BT30

BT40

HSK 40E

HSK 63A

HSK100A

STRAIGHT SHANKS

COLLETS

PARTS & ACCESS.

SHRINK MACHINES

INDEXERS

