

HSK063A ER Collet Chucks





Features

- 3 μm - 0.0001" Runout Taper to Taper
- Coolant Thru Body
- Dynamically Pre-Balanced G6.3 @ 20,000 RPM or <1gmm

Optional (Order Separately):

- Wrench
- Torque Wrench
- Collets
 - 0.010mm (0.0004") Standard
 - 0.005mm (0.0002") Ultra Precision
 - Sealed (Select Sizes)
 - Jet-Blast (Select Sizes)
- Fine Trim Balance (Sample cutter required for balance compensation)

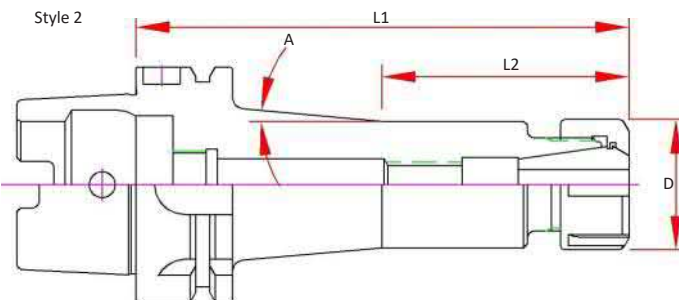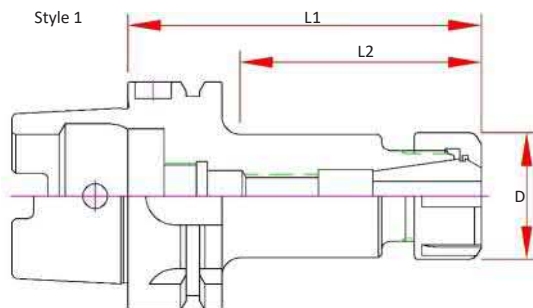

| Part Number | Style | A | D | Max. Tool Enters | L1 Projection | L2 | Screw | Nut | Wrench |
|-------------------|-------|----|------|------------------|---------------|------|----------|---------|---------|
| HSK063A-ER16H-075 | 1 | - | | 1.38 | 2.95 | 1.51 | | | |
| HSK063A-ER16H-100 | 1 | - | 1.10 | 2.00 | 3.94 | 2.79 | ASC-ER16 | ERN-16H | ERW-16H |
| HSK063A-ER16H-160 | 2 | 5° | | 3.05 | 6.30 | 2.36 | | | |
| HSK063A-ER20H-075 | 1 | - | | 1.34 | 2.95 | 1.51 | | | |
| HSK063A-ER20H-100 | 1 | - | 1.33 | 1.87 | 3.94 | 2.65 | ASC-ER20 | ERN-20H | ERW-20H |
| HSK063A-ER20H-160 | 1 | - | | 2.89 | 6.30 | 5.08 | | | |
| HSK063A-ER25-075 | 1 | - | | 1.34 | 2.95 | 1.51 | | | |
| HSK063A-ER25-100 | 1 | - | 1.65 | 2.20 | 3.94 | 2.72 | ASC-ER25 | ERN-25 | ERW-25E |
| HSK063A-ER25-160 | 1 | - | | 3.90 | 6.30 | 5.08 | | | |
| HSK063A-ER32-075 | 1 | - | | 1.46 | 2.95 | 1.51 | | | |
| HSK063A-ER32-100 | 1 | - | 1.96 | 2.17 | 3.94 | 2.83 | ASC-ER32 | ERN-32 | ERW-32E |
| HSK063A-ER32-160 | 1 | - | | 4.33 | 6.30 | 5.20 | | | |
| HSK063A-ER40-085 | 1 | - | | 1.77 | 3.35 | 1.73 | | | |
| HSK063A-ER40-120 | 1 | - | 2.48 | 2.83 | 4.72 | 3.70 | ASC-ER40 | ERN-40 | ERW-40E |
| HSK063A-ER40-160 | 1 | - | | 4.02 | 6.30 | 5.20 | | | |