


# CAT40 ER Collet Chucks

## Features

- 3 µm - 0.0001" Runout Taper to Taper
- Coolant Thru Body
- Dynamically Pre-Balanced G6.3 @ 20,000 RPM or <1gmm
- Tapers are ground better than AT3 for optimal T.I.R.

## Optional (Order Separately):

- Wrench
- Torque Wrench
- Collets
  - 0.010mm (0.0004") Standard
  - 0.005mm (0.0002") Ultra Precision
  - Sealed (Select Sizes)
  - Jet-Blast (Select Sizes)
- DIN-B Coolant (Select models)

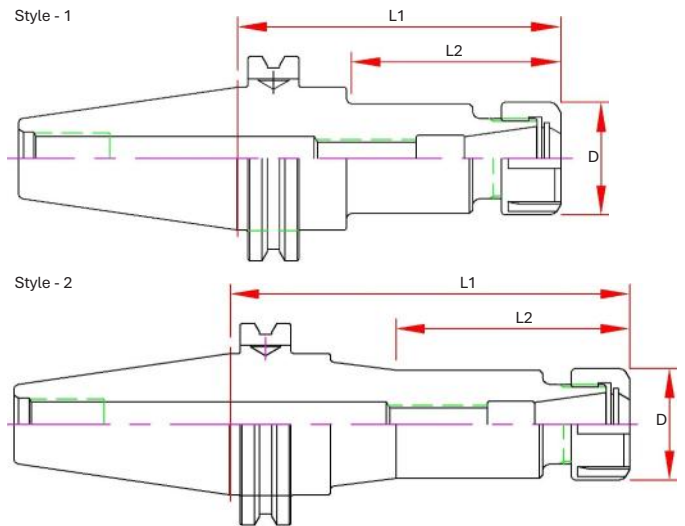

Dual Contact Spindle Part Number	Standard Spindle Part Number	Range	D	L1 Projection	L2	Screw	Nut	Wrench	Style
	CAT40-ER11H-0250			2.50	1.75				1
	CAT40-ER11H-0400	.019-.276	0.79	4.00	2.50	ASC-ER11	ERN-11H	ERW-11H	1
	CAT40-ER11H-0600			6.00	1.83				2
CAT40-ER16H-0250-B	CAT40-ER16H-0250			2.50	1.55				1
CAT40-ER16H-0400-B	CAT40-ER16H-0400	.019-.394	1.10	4.00	2.42	ASC-ER16	ERN-16H	ERW-16H	1
CAT40-ER16H-0600-B	CAT40-ER16H-0600			6.00	4.42				1
	CAT40-ER16H-0800			8.00	6.42				1
CAT40-ER20H-0250-B	CAT40-ER20H-0250			2.50	1.63				1
CAT40-ER20H-0400-B	CAT40-ER20H-0400	.019-.512	1.33	4.00	2.50	ASC-ER20	ERN-20H	ERW-20H	1
CAT40-ER20H-0600-B	CAT40-ER20H-0600			6.00	4.60				1
CAT40-ER20H-0800-B	CAT40-ER20H-0800			8.00	6.60				1
CAT40-ER25-0250-B	CAT40-ER25-0250			2.50	1.73				1
CAT40-ER25-0400-B	CAT40-ER25-0400	.019-.630	1.65	4.00	2.58	ASC-ER25	ERN-25	ERW-25E	1
CAT40-ER25-0600-B	CAT40-ER25-0600			6.00	4.60				1
	CAT40-ER25-0800			8.00	6.60				1
CAT40-ER32-0250-B	CAT40-ER32-0250			2.50	1.73				1
CAT40-ER32-0400-B	CAT40-ER32-0400	.039-.787	1.96	4.00	3.23	ASC-ER32	ERN-32	ERW-32E	1
CAT40-ER32-0600-B	CAT40-ER32-0600			6.00	5.23				1
	CAT40-ER32-0800			8.00	7.25				1
CAT40-ER40-0250-B	CAT40-ER40-0250			2.50	1.75				1
CAT40-ER40-0400-B	CAT40-ER40-0400	.079-1.024	2.48	4.00	3.25	ASC-ER40	ERN-40	ERW-40E	1
	CAT40-ER40-0600			6.00	5.25				1

CAT 40  
CAT50  
BT30  
BT40  
HSK 40E  
HSK 63A  
HSK 100A  
STR. SHANKS  
COLLETS  
ACC.  
SHRINK MACH  
INDEXERS

