HSK100A ER Collet Chucks




Features


- **3 µm - 0.0001" Runout Taper to Taper**
- Coolant Thru Body
- Dynamically Pre-Balanced G6.3 @ 15,000 RPM or <1gmm

Optional (Order Separately):

- Wrench
- Torque Wrench
- Collets
  - 0.010mm (0.0004") Standard
  - 0.005mm (0.0002") Ultra Precision
  - Sealed (Select Sizes)
  - Jet-Blast (Select Sizes)



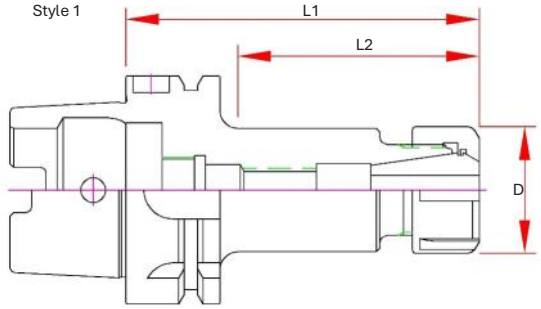

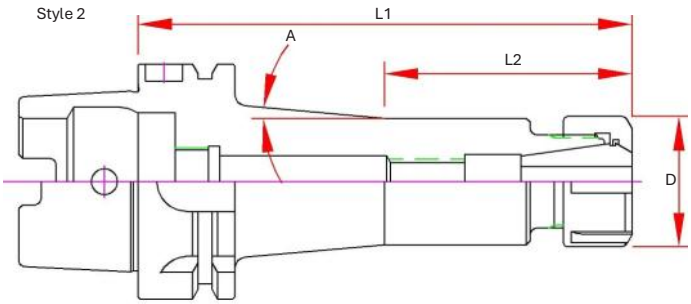

Part Number	Style	A	D	Max. Tool Enters	L1 Projection	L2	Nut	Wrench
HSK100A-ER16H-100	1	-	1.10	2.80	3.94	2.20	ERN-16H	ERW-16H
HSK100A-ER16H-160	2	6°		5.17	6.30	2.76		
HSK100A-ER25-100	1	-	1.65	2.63	3.94	2.20	ERN-25	ERW-25E
HSK100A-ER25-160	2	3°		2.95	6.30	3.35		
HSK100A-ER32-100	1	-	1.96	2.67	3.94	2.20	ERN-32	ERW-32E
HSK100A-ER32-160	2	3°		3.22	6.30	3.39		
HSK100A-ER40-120	1	-	2.48	3.46	4.72	3.35	ERN-40	ERW-40E
HSK100A-ER40-160	2	4°		3.78	6.30	3.48		