CAT40 ER Collet Chucks



Features


- **3 µm - 0.0001" Runout Taper to Taper**
- Coolant Thru Body
- Dynamically Pre-Balanced G6.3 @ 20,000 RPM or <1gmm
- Tapers are ground better than AT3 for optimal T.I.R.

Optional (Order Separately):


- Wrench
- Torque Wrench
- Collets
  - 0.010mm (0.0004") Standard
  - 0.005mm (0.0002") Ultra Precision
  - Sealed (Select Sizes)
  - Jet-Blast (Select Sizes)
- DIN-B Coolant (Select models)



Style - 1

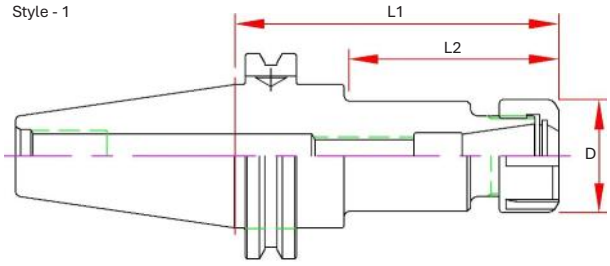

Style - 2

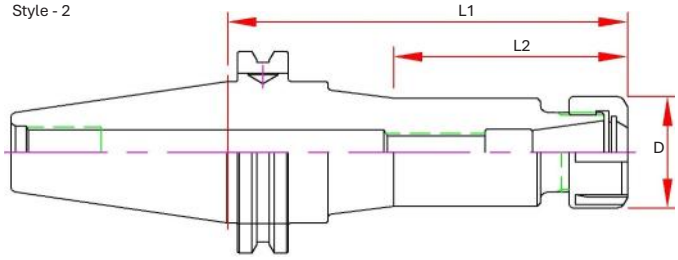

Dual Contact Spindle Part Number	Standard Spindle Part Number	Range	D	L1 Projection	L2	Screw	Nut	Wrench	Style
	CAT40-ER11H-0250	.019-.276	0.79	2.50	1.75	ASC-ER11	ERN-11H	ERW-11H	1
	CAT40-ER11H-0400			4.00	2.50				1
	CAT40-ER11H-0600			6.00	1.83				2
CAT40-ER16H-0250-B	CAT40-ER16H-0250	.019-.394	1.10	2.50	1.55	ASC-ER16	ERN-16H	ERW-16H	1
CAT40-ER16H-0400-B	CAT40-ER16H-0400			4.00	2.42				1
CAT40-ER16H-0600-B	CAT40-ER16H-0600			6.00	4.42				1
	CAT40-ER16H-0800			8.00	6.42				1
CAT40-ER20H-0250-B	CAT40-ER20H-0250	.019-.512	1.33	2.50	1.63	ASC-ER20	ERN-20H	ERW-20H	1
CAT40-ER20H-0400-B	CAT40-ER20H-0400			4.00	2.50				1
CAT40-ER20H-0600-B	CAT40-ER20H-0600			6.00	4.60				1
CAT40-ER20H-0800-B	CAT40-ER20H-0800			8.00	6.60				1
CAT40-ER25-0250-B	CAT40-ER25-0250	.019-.630	1.65	2.50	1.73	ASC-ER25	ERN-25	ERW-25E	1
CAT40-ER25-0400-B	CAT40-ER25-0400			4.00	2.58				1
CAT40-ER25-0600-B	CAT40-ER25-0600			6.00	4.60				1
	CAT40-ER25-0800			8.00	6.60				1
CAT40-ER32-0250-B	CAT40-ER32-0250	.039-.787	1.96	2.50	1.73	ASC-ER32	ERN-32	ERW-32E	1
CAT40-ER32-0400-B	CAT40-ER32-0400			4.00	3.23				1
CAT40-ER32-0600-B	CAT40-ER32-0600			6.00	5.23				1
	CAT40-ER32-0800			8.00	7.25				1
CAT40-ER40-0250-B	CAT40-ER40-0250	.079-1.024	2.48	2.50	1.75	ASC-ER40	ERN-40	ERW-40E	1
CAT40-ER40-0400-B	CAT40-ER40-0400			4.00	3.25				1
	CAT40-ER40-0600			6.00	5.25				1