
HSK063A Shrink Fit - Inch



Features

- 3 µm - 0.0001" Runout Taper to Bore
- Manufactured from ISO-40CrMoV5 (H13) Material, Heat Treated for Optimum Elasticity and Tool Life
- X Jet-Blast Pluggable Coolant Ports
- Dynamically Balanced for G2.5 @ 25,000 RPM or < 1 gmm
- Preset Screw included for 1/4" & larger for positive stop
- **Designed for Carbide Cutting Tools with h6 shank tolerance**

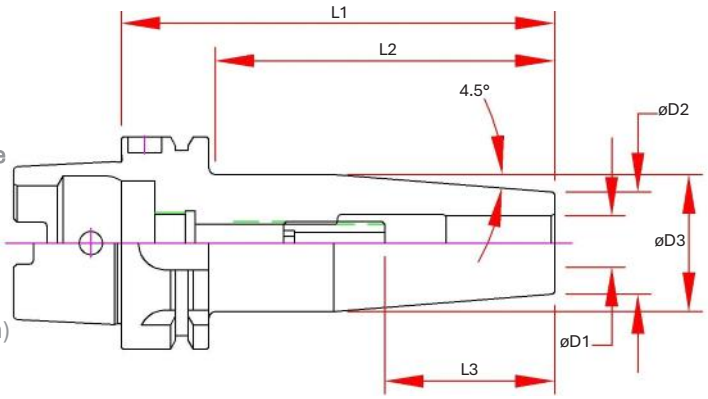

Optional (Order Separately):

- Fine Trim Balance
  (Sample cutter required for balance compensation)


P-84

Part Number	D1 Bore	D2	D3	L1 Projection	L2	L3 Max Tool Enters	Preset Screw
HSK063A-SD012-080X	0.1250	0.39	0.71	3.15	2.02	2.28	-
HSK063A-SD012-130X	0.1250	0.39	0.71	5.12	3.98	4.09	-
HSK063A-SD012-160X	0.1250	0.39	0.75	6.30	5.16	5.43	-
HSK063A-SD018-080X	0.1875	0.39	0.71	3.15	2.02	2.28	-
HSK063A-SD018-130X	0.1875	0.39	0.71	5.12	3.98	4.09	-
HSK063A-SD018-160X	0.1875	0.39	0.75	6.30	5.16	5.43	-
HSK063A-SD025-080X	0.2500	0.83	1.06	3.15	2.02	1.54	SCW-ASC-SD025
HSK063A-SD025-130X	0.2500	0.83	1.06	5.12	3.98	1.54	SCW-ASC-SD025
HSK063A-SD025-160X	0.2500	0.83	1.06	6.30	5.16	1.54	SCW-ASC-SD025
HSK063A-SD031-080X	0.3125	0.83	1.06	3.15	2.02	1.54	SCW-ASC-SD031
HSK063A-SD031-160X	0.3125	0.83	1.06	6.30	5.16	1.54	SCW-ASC-SD031
HSK063A-SD037-085X	0.3750	0.94	1.06	3.35	2.21	1.73	SCW-ASC-SD037
HSK063A-SD037-130X	0.3750	0.94	1.06	5.12	3.98	1.73	SCW-ASC-SD037
HSK063A-SD037-160X	0.3750	0.94	1.06	6.30	5.16	1.73	SCW-ASC-SD037
HSK063A-SD050-090X	0.5000	0.94	1.26	3.54	2.41	1.97	SCW-ASC-SD050
HSK063A-SD050-130X	0.5000	0.94	1.26	5.12	3.98	1.97	SCW-ASC-SD050
HSK063A-SD050-160X	0.5000	0.94	1.26	6.30	5.16	1.97	SCW-ASC-SD050
HSK063A-SD062-095X	0.6250	1.06	1.34	3.74	2.61	1.97	SCW-ASC-SD062
HSK063A-SD062-130X	0.6250	1.06	1.34	5.12	3.98	1.97	SCW-ASC-SD062
HSK063A-SD062-160X	0.6250	1.06	1.34	6.30	5.16	1.97	SCW-ASC-SD062
HSK063A-SD075-100X	0.7500	1.30	1.65	3.94	2.80	2.05	SCW-ASC-SD062
HSK063A-SD075-130X	0.7500	1.30	1.65	5.12	3.98	2.05	SCW-ASC-SD062
HSK063A-SD075-160X	0.7500	1.30	1.65	6.30	5.16	2.05	SCW-ASC-SD062
HSK063A-SD100-115X	1.0000	1.73	2.09	4.53	3.50	2.28	SCW-ASC-SD100
HSK063A-SD100-130X	1.0000	1.73	2.09	5.12	3.98	2.28	SCW-ASC-SD100
HSK063A-SD100-160X	1.0000	1.73	2.09	6.30	5.16	2.28	SCW-ASC-SD100
HSK063A-SD125-120X	1.2500	1.73	2.09	4.72	3.70	2.40	SCW-ASC-SD100
HSK063A-SD125-160X	1.2500	1.73	2.09	6.30	5.16	2.40	SCW-ASC-SD100